


WATER-REPELLENT ADMIXTURE FOR MORTAR

ASTM E-514, C-780

AQUASHIELD™ FOR MORTAR

- DESCRIPTION** AquaShield Water-Repellent Admixture is a jobsite-added liquid polymer for use in masonry mortar. AquaShield enhanced mortar provides significant resistance to water penetration and migration while enhancing bond and reducing potential efflorescence of mortar.
- ADVANTAGES** Reduces absorption and capillary migration
Increases efflorescence control
Improves color intensity
Increases flexural strength
Increases bond
Non-chloride, non-corrosive
- PERFORMANCE** Testing was conducted by the Research and Development Laboratory of The National Concrete Masonry Association (NCMA) to evaluate the performance of single wythe concrete masonry wall systems incorporating the AquaShield Integral Water Repellent System. The water repellency testing was done in accordance with ASTM E514, "Standard Test Method for Water Penetration and Leakage Through Masonry." Type S mortars were batched and tested in accordance with ASTM C-270, "Standard specifications for Mortar for Unit Masonry" and ASTM C-780. It was observed that for all wall panels with the AquaShield Integral Water Repellent System, water penetration through the entire wall section did not occur and no dampness was observed. Test results available upon request.
- DOSAGE RATES** Add AquaShield Mortar Admixture at a rate of 16 ounces per cubic ft. of cementitious material. Mix as per recommendations on AquaShield Mortar Admixture label.
- PACKAGING** 3 gallon, 55 gallon, totes
- STORAGE AND HANDLING** Protect from freezing and exposure to direct sunlight.
- DESIGN AND CONSTRUCTION CONSIDERATIONS** AquaShield Integral Water Repellent System must complement, rather than replace, quality and construction practices of weeps, flashings and workmanship as recommended and contained in National Concrete Masonry Association TEK Manual. All projects incorporating concrete masonry units Manufactured with AquaShield Integral Water Repellent for Concrete Masonry Units must incorporate AquaShield Mortar Admixture into the accompanying Mortar to complete the moisture resistance of the wall system. Contact your Ridgeview Concrete Technologies representative for additional information.

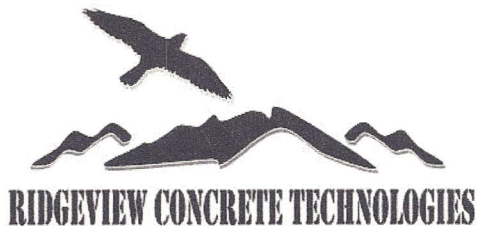

Contact Us At:

Ridgeview Concrete Technologies
16 Lower Hill Road
Newton, NJ 07860

Phone: 973.300.5093
Fax: 973.579.1043

www.ridgeviewconcretetechnologies.com

KEEP CONTAINER TIGHTLY CLOSED.
KEEP OUT OF REACH OF CHILDREN.
NOT FOR INTERNAL CONSUMPTION.
FOR INDUSTRIAL USE ONLY.
CONSULT MATERIAL SAFETY DATA SHEET FOR MORE INFORMATION.

Ridgeview Concrete Technologies (RCT) warrants its products to be free of manufacturing defects and that the additives will meet RCT's current published physical properties when applied in accordance with RCT's directions and tested in accordance with ASTM and RCT's standards. There are no other warranties by RCT of any nature whatsoever, expressed or Implied. RCT shall also not be liable for damages of any sort. RCT shall also not be responsible for use of this product in a manner to infringe on any patent held by others.