


AIR-ENTRAINING ADMIXTURE FOR CONCRETE

ASTM C-260; AASHTO M-154; CRD C-13

SETCON 6A

- DESCRIPTION** Setcon 6A is an industry proven air entraining admixture for concrete. Setcon 6A meets or exceeds the requirements of ASTM C-260, CRD C-13 AND AASHTO M-154 Standards for air-entraining agents.
- ADVANTAGES** Stable bubble sizes in all types of concrete mixes
Reduces bleeding and segregation
Reduces permeability
Increases durability
Improves workability
- PERFORMANCE** Produces air-entrained concrete, which is considerably more resistant to freezing and thawing and scaling de-icing salts and other *severe* exposure conditions. In addition, air-entraining reduces bleeding and helps to increase workability of lean/harsh mixes.
- DOSAGE RATES** SETCON 6A is recommended for use at the rate of 0.25 to 4 oz. per 100 lbs of cement depending upon the application, required strength or desired slump. For additional information, contact your RCT representative.
- NON-CHLORIDE, NON-CORROSIVE** Setcon 6A will not initiate or promote corrosion of reinforcing steel embedded in concrete, pre-stressed concrete or concrete placed on galvanized steel floor and roof systems.
- COMPATIBILITY** SETCON 6A should not be mixed with other admixtures prior to addition to concrete. For recommendations, contact your RCT representative.
- PACKAGING** Bulk, totes, 55-gallon drums, 5-gallon pails
- PRECAUTIONS** Care should be taken to maintain product temperature above 40°F. Refer to MSDS for chemical properties.

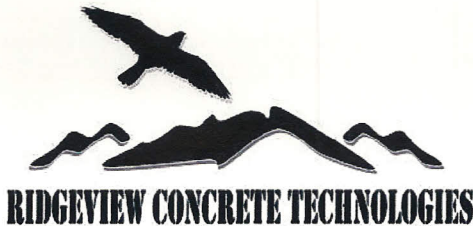

Contact Us At:

Ridgeview Concrete Technologies
16 Lower Hill Road
Newton, NJ 07860

Phone: 973.300.5093
Fax: 973.579.1043

www.ridgeviewconcretetechnologies.com

**KEEP CONTAINER TIGHTLY CLOSED.
KEEP OUT OF REACH OF CHILDREN.
NOT FOR INTERNAL CONSUMPTION.
FOR INDUSTRIAL USE ONLY.
CONSULT MATERIAL SAFETY DATA SHEET FOR MORE INFORMATION.**

Ridgeview Concrete Technologies (RCT) warrants its products to be free of manufacturing defects and that the additives will meet RCT's current published physical properties when applied in accordance with RCT's directions and tested in accordance with ASTM and RCT's standards. There are no other warranties by RCT of any nature whatsoever, expressed or Implied. RCT shall also not be liable for damages of any sort. RCT shall also not be responsible for use of this product in a manner to infringe on any patent held by others.